



Mutina


Tex
by Raw Edges

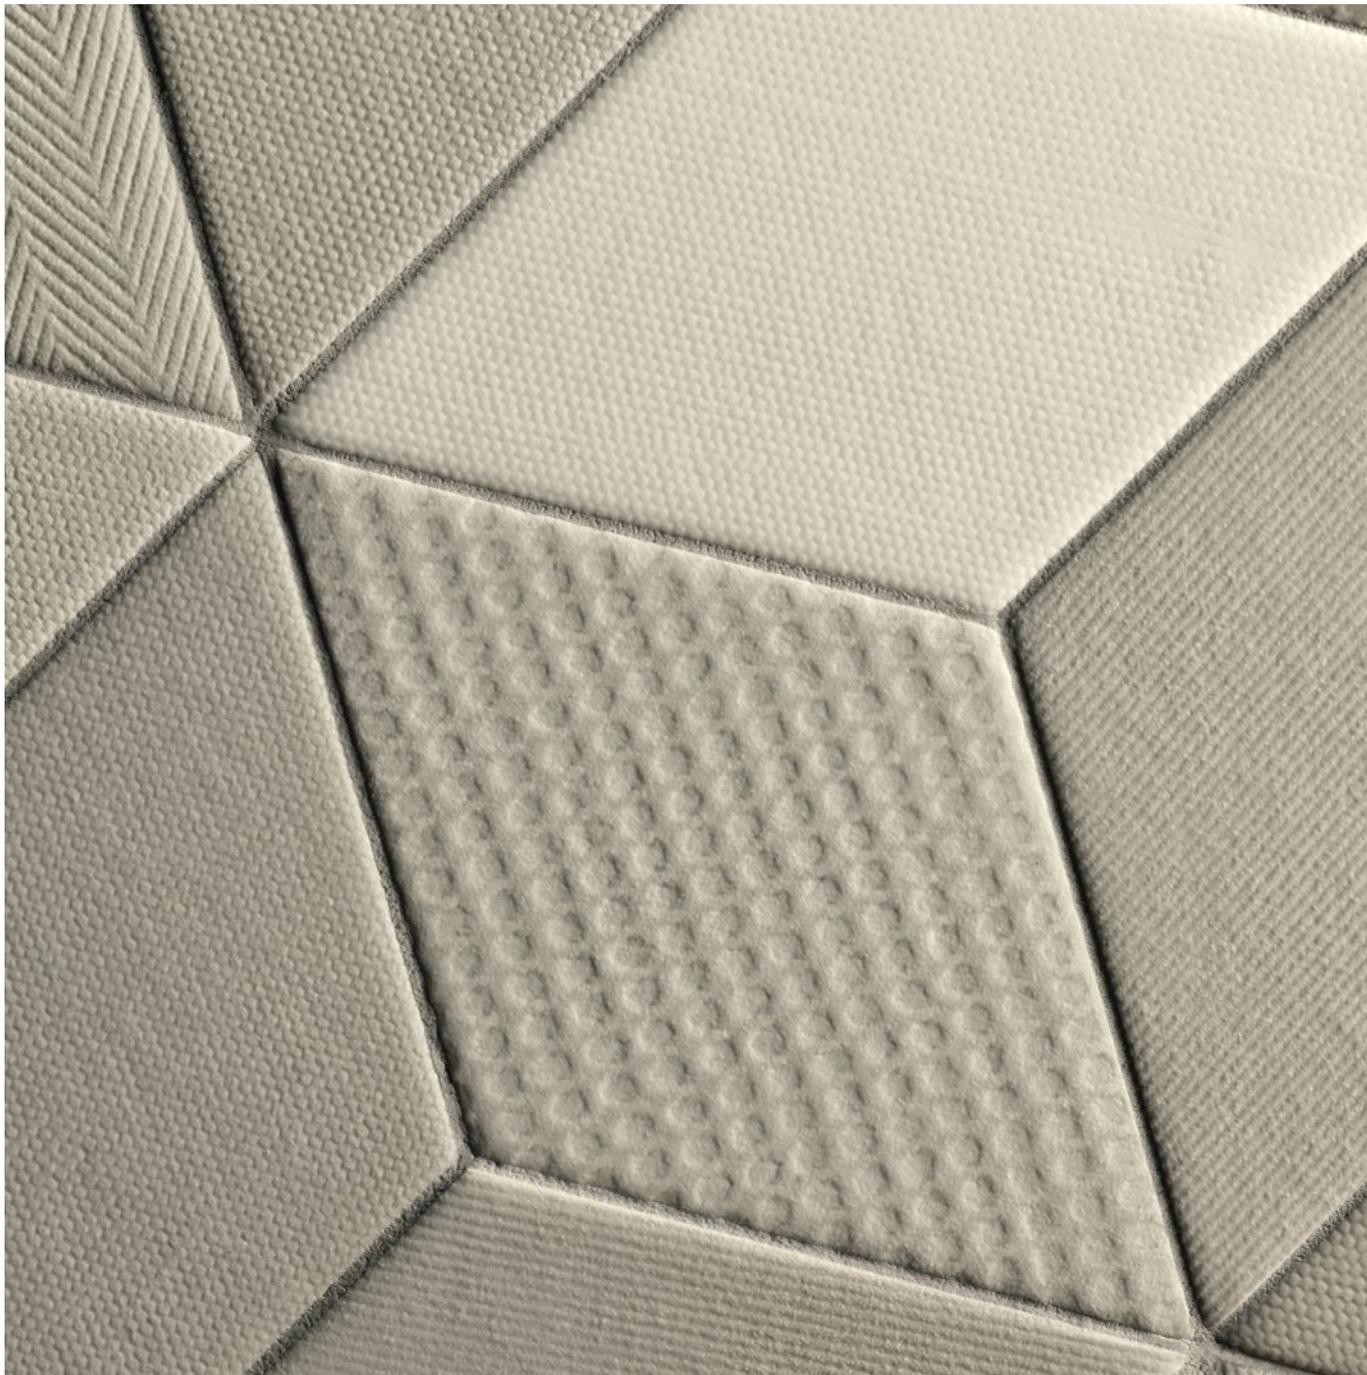

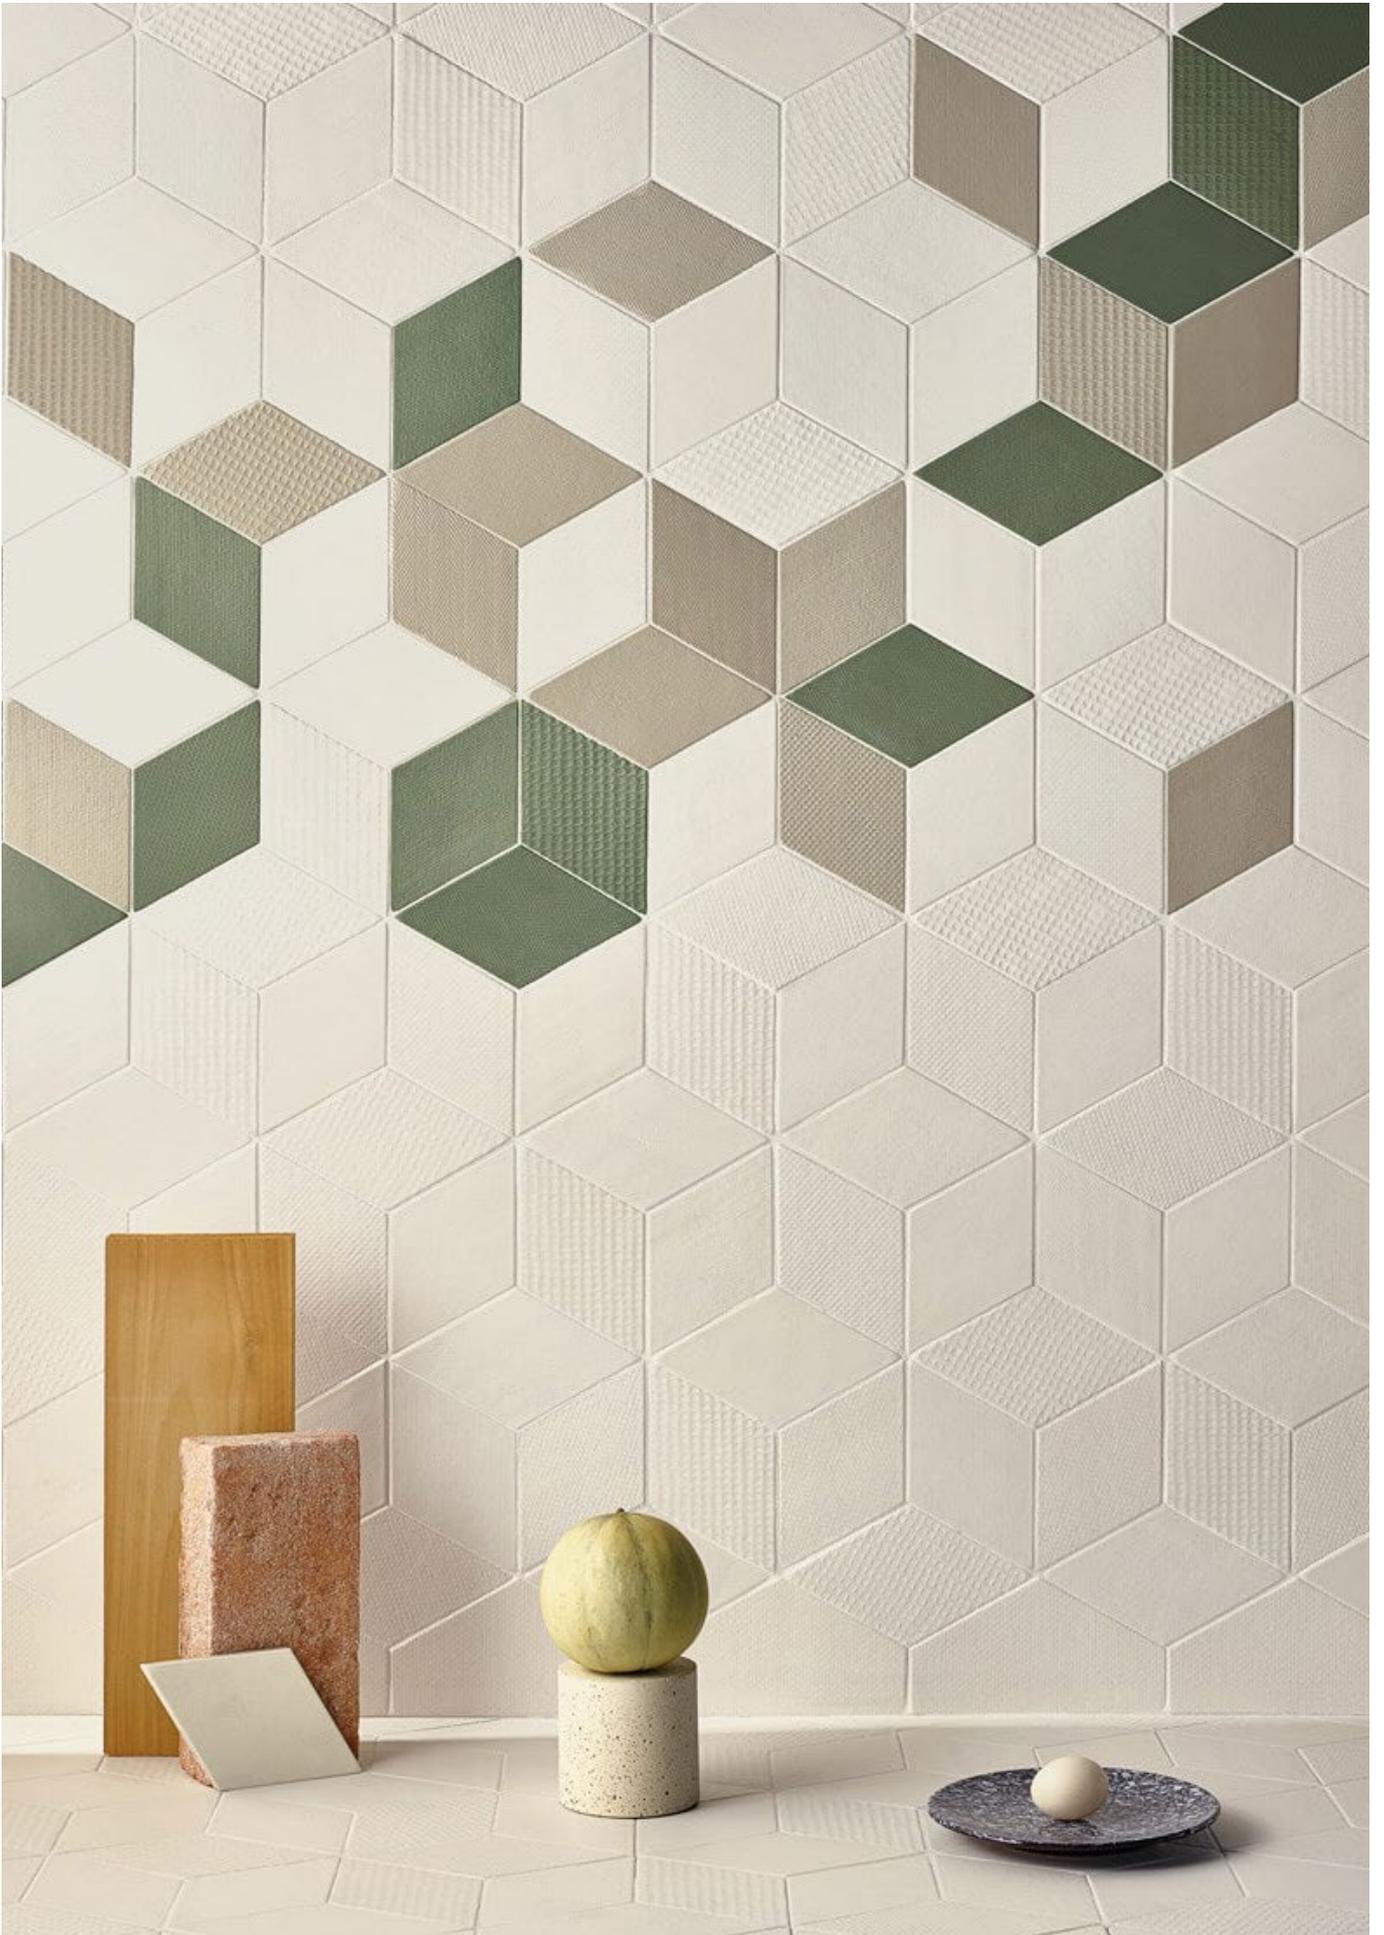

Wall: Tex White, Olive, Cream. Floor: Tex White

Colors

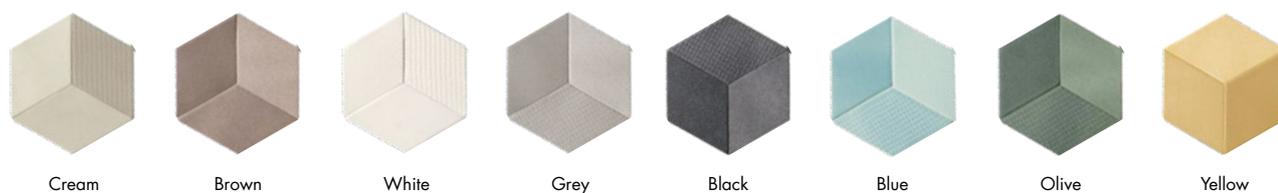

grouts

matching grout



Tex White: Calce 01



Tex Grey: Grigio 44



Tex Black: Nero 06



Tex Brown: Brown 54



Tex Cream: Cream 45



Tex Olive: Olive 64




Tex Yellow: Yellow 30




Tex Blue: Blue 40

contrast grout




Tex White:
Kerakoll Lissoni 6



Tex Cream, Olive, Blue, Yellow, Brown, Black, Grey: Bianco 50


General information

collection	Tex
design	Raw Edges, 2012
production	Industrial
material	Glazed porcelain stoneware
thickness	10 mm
nominal sizes	11,5-20 cm (4" -8") runner 35-40,4 cm (13 ²⁵ / ₃₂ " -15 ²⁹ / ₃₂ "
specification	<ul style="list-style-type: none"> - Rhombus shaped tile 11,5 x 20 cm, thickness 10mm, available in 8 colours. - 8 different colors on a matt surface, each of which contains a group of three shades and 5 relief textures inspired by textile design, re-creating the feel of the different tones of the yarn. - The three shades and five textures will be placed randomly in the packages; by this, when installing Tex, arbitrary arrangements could be achieved. On the other hand, in addition to the single tiles installation, premade patterns named "Runner", are available on a mesh similarly to mosaics settings.
complementary pieces	Skirting
awards	Interior Innovation Award 2014
patents	Registered design n° 002193797-0001/0014 - date of registration: 28/02/2013
category	UNI EN 14411 App G (BIA group) GL

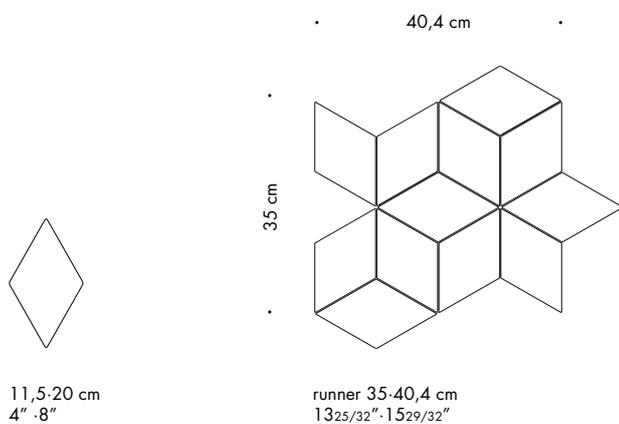

complementary pieces

skirting
10,5-20 cm
4 1/8" - 8"



Laying and maintenance tips

use	Floor, wall – indoor, outdoor.
installation	The material is deliberately shaded. Take the material from several boxes and mix carefully.
recommended adhesive	Adhesive for porcelain stoneware.
recommended joints	2mm joints. Use wedges to fix the caliber differences in work size between tiles.
recommended fillers	Cement-based grout / epoxy grout.
cleaning at the end of installation	<p>CEMENT-BASED GROUT: Buffered acid (e.g. DETERDEK PRO by FILA, or similar). Wet the floor with water, dilute the product 1:5 with water and pour it on the floor. Wait for 2 or 3 minutes then use a white scotch brite pad and rinse well with clean water.</p> <p>EPOXY GROUT: Alkaline detergent (e.g. FILA CR10 by FILA). FILA CR10: apply pure, wait for 30 minutes then use a green scotch brite pad.</p> <p>SILICONE: Solvent for silicone (e.g. FILA ZERO SIL). Pour it straight onto the stain, wait for 20 minutes and remove the mark using scotch brite.</p> <p>PAINT: Can usually be removed using water, but if resin-based paints or particular enamels have been used, it is best to ask the manufacturer which solvent is most suitable.</p> <p>RUST: stain remover es. FILA NO RUST. Apply the product onto the stain, leave for 15 minutes, remove the residue and rinse thoroughly.</p>
general cleaning (installed tiles)	<p>You are recommended to use ordinary neutral detergent diluted in water. Avoid using acid or alkaline products, waxes and/or impregnants. During ordinary cleaning it is recommended to use extremely abrasive items (such as scourers and iron or steel sponges) as little as possible. This recommendation must be adhered to rigorously in the case of tiles with a glossy surface finishing as they are more susceptible to the risk of scuffs, scratches and loss of shine, etc. In the event of heavy dirt or particularly textured surfaces, use an alkaline detergent and rinse after washing. For large surfaces, the use of a floor washing machine is recommended. During every-day cleaning procedures, it is necessary to remember that certain types of dirt (dust, sand) increase the abrasive effect of foot-traffic. Therefore we recommend that you avoid bringing in this type of dirt, which comes in from the outside, by placing a door-mat at the entrance.</p>
calibers (real size)	1 mm tolerance